
Cartographer Documentation

Release 1.0.0

The Cartographer Authors

Nov 24, 2017

1	Configuration	1
1.1	cartographer.common.proto.CeresSolverOptions	1
1.2	cartographer.mapping.pose_graph.proto.ConstraintBuilderOptions	1
1.3	cartographer.mapping.pose_graph.proto.OptimizationProblemOptions	2
1.4	cartographer.mapping.proto.MapBuilderOptions	2
1.5	cartographer.mapping.proto.MotionFilterOptions	2
1.6	cartographer.mapping.proto.PoseGraphOptions	2
1.7	cartographer.mapping.proto.TrajectoryBuilderOptions	3
1.8	cartographer.mapping_2d.proto.LocalTrajectoryBuilderOptions	3
1.9	cartographer.mapping_2d.proto.RangeDataInserterOptions	4
1.10	cartographer.mapping_2d.proto.SubmapsOptions	4
1.11	cartographer.mapping_2d.scan_matching.proto.CeresScanMatcherOptions	4
1.12	cartographer.mapping_2d.scan_matching.proto.FastCorrelativeScanMatcherOptions	4
1.13	cartographer.mapping_2d.scan_matching.proto.RealTimeCorrelativeScanMatcherOptions	5
1.14	cartographer.mapping_3d.proto.LocalTrajectoryBuilderOptions	5
1.15	cartographer.mapping_3d.proto.RangeDataInserterOptions	5
1.16	cartographer.mapping_3d.proto.SubmapsOptions	6
1.17	cartographer.mapping_3d.scan_matching.proto.CeresScanMatcherOptions	6
1.18	cartographer.mapping_3d.scan_matching.proto.FastCorrelativeScanMatcherOptions	6
1.19	cartographer.sensor.proto.AdaptiveVoxelFilterOptions	6
2	Terminology	9
2.1	Frames	9
2.2	Transforms	9
3	Technical Overview	11
4	Getting started	13
4.1	Getting started with ROS	13
4.2	Getting started without ROS	13
5	System Requirements	15
5.1	Known Issues	15
6	How to cite us	17

1.1 `cartographer.common.proto.CeresSolverOptions`

bool use_nonmonotonic_steps Configure the Ceres solver. See the Ceres documentation for more information: <https://code.google.com/p/ceres-solver/>

int32 max_num_iterations Not yet documented.

int32 num_threads Not yet documented.

1.2 `cartographer.mapping.pose_graph.proto.ConstraintBuilderOptions`

double sampling_ratio A constraint will be added if the proportion of added constraints to potential constraints drops below this number.

double max_constraint_distance Threshold for poses to be considered near a submap.

double min_score Threshold for the scan match score below which a match is not considered. Low scores indicate that the scan and map do not look similar.

double global_localization_min_score Threshold below which global localizations are not trusted.

double loop_closure_translation_weight Weight used in the optimization problem for the translational component of loop closure constraints.

double loop_closure_rotation_weight Weight used in the optimization problem for the rotational component of loop closure constraints.

bool log_matches If enabled, logs information of loop-closing constraints for debugging.

cartographer.mapping_2d.scan_matching.proto.FastCorrelativeScanMatcherOptions fast_correlative_scan_matcher_options Options for the internally used scan matchers.

cartographer.mapping_2d.scan_matching.proto.CeresScanMatcherOptions ceres_scan_matcher_options Not yet documented.

cartographer.mapping_3d.scan_matching.proto.FastCorrelativeScanMatcherOptions fast_correlative_scan_matcher_options_3d
Not yet documented.

cartographer.mapping_3d.scan_matching.proto.CeresScanMatcherOptions ceres_scan_matcher_options_3d
Not yet documented.

1.3 cartographer.mapping.pose_graph.proto.OptimizationProblemOptions

double huber_scale Scaling parameter for Huber loss function.

double acceleration_weight Scaling parameter for the IMU acceleration term.

double rotation_weight Scaling parameter for the IMU rotation term.

double consecutive_node_translation_weight Scaling parameter for translation between consecutive nodes.

double consecutive_node_rotation_weight Scaling parameter for rotation between consecutive nodes.

double fixed_frame_pose_translation_weight Scaling parameter for the FixedFramePose translation.

double fixed_frame_pose_rotation_weight Scaling parameter for the FixedFramePose rotation.

bool log_solver_summary If true, the Ceres solver summary will be logged for every optimization.

cartographer.common.proto.CeresSolverOptions ceres_solver_options Not yet documented.

1.4 cartographer.mapping.proto.MapBuilderOptions

bool use_trajectory_builder_2d Not yet documented.

bool use_trajectory_builder_3d Not yet documented.

int32 num_background_threads Number of threads to use for background computations.

cartographer.mapping.proto.PoseGraphOptions pose_graph_options Not yet documented.

1.5 cartographer.mapping.proto.MotionFilterOptions

double max_time_seconds Threshold above which range data is inserted based on time.

double max_distance_meters Threshold above which range data is inserted based on linear motion.

double max_angle_radians Threshold above which range data is inserted based on rotational motion.

1.6 cartographer.mapping.proto.PoseGraphOptions

int32 optimize_every_n_nodes Online loop closure: If positive, will run the loop closure while the map is built.

cartographer.mapping.pose_graph.proto.ConstraintBuilderOptions constraint_builder_options Options for the constraint builder.

double matcher_translation_weight Weight used in the optimization problem for the translational component of non-loop-closure scan matcher constraints.

double matcher_rotation_weight Weight used in the optimization problem for the rotational component of non-loop-closure scan matcher constraints.

cartographer.mapping.pose_graph.proto.OptimizationProblemOptions optimization_problem_options

Options for the optimization problem.

int32 max_num_final_iterations Number of iterations to use in ‘optimization_problem_options’ for the final optimization.

double global_sampling_ratio Rate at which we sample a single trajectory’s nodes for global localization.

bool log_residual_histograms Whether to output histograms for the pose residuals.

double global_constraint_search_after_n_seconds If for the duration specified by this option no global constraint has been added between two trajectories, loop closure searches will be performed globally rather than in a smaller search window.

1.7 cartographer.mapping.proto.TrajectoryBuilderOptions

cartographer.mapping_2d.proto.LocalTrajectoryBuilderOptions trajectory_builder_2d_options Not yet documented.

cartographer.mapping_3d.proto.LocalTrajectoryBuilderOptions trajectory_builder_3d_options Not yet documented.

bool pure_localization Not yet documented.

1.8 cartographer.mapping_2d.proto.LocalTrajectoryBuilderOptions

float min_range Rangefinder points outside these ranges will be dropped.

float max_range Not yet documented.

float min_z Not yet documented.

float max_z Not yet documented.

float missing_data_ray_length Points beyond ‘max_range’ will be inserted with this length as empty space.

int32 num_accumulated_range_data Number of range data to accumulate into one unwrapped, combined range data to use for scan matching.

float voxel_filter_size Voxel filter that gets applied to the range data immediately after cropping.

cartographer.sensor.proto.AdaptiveVoxelFilterOptions adaptive_voxel_filter_options Voxel filter used to compute a sparser point cloud for matching.

cartographer.sensor.proto.AdaptiveVoxelFilterOptions loop_closure_adaptive_voxel_filter_options Voxel filter used to compute a sparser point cloud for finding loop closures.

bool use_online_correlative_scan_matching Whether to solve the online scan matching first using the correlative scan matcher to generate a good starting point for Ceres.

cartographer.mapping_2d.scan_matching.proto.RealTimeCorrelativeScanMatcherOptions real_time_correlative_scan_matcher_options Not yet documented.

cartographer.mapping_2d.scan_matching.proto.CeresScanMatcherOptions ceres_scan_matcher_options Not yet documented.

cartographer.mapping.proto.MotionFilterOptions motion_filter_options Not yet documented.

double imu_gravity_time_constant Time constant in seconds for the orientation moving average based on observed gravity via the IMU. It should be chosen so that the error 1. from acceleration measurements not due to gravity (which gets worse when the constant is reduced) and 2. from integration of angular velocities (which gets worse when the constant is increased) is balanced.

cartographer.mapping_2d.proto.SubmapsOptions submaps_options Not yet documented.

bool use_imu_data True if IMU data should be expected and used.

1.9 cartographer.mapping_2d.proto.RangeDataInserterOptions

double hit_probability Probability change for a hit (this will be converted to odds and therefore must be greater than 0.5).

double miss_probability Probability change for a miss (this will be converted to odds and therefore must be less than 0.5).

bool insert_free_space If 'false', free space will not change the probabilities in the occupancy grid.

1.10 cartographer.mapping_2d.proto.SubmapsOptions

double resolution Resolution of the map in meters.

int32 num_range_data Number of range data before adding a new submap. Each submap will get twice the number of range data inserted: First for initialization without being matched against, then while being matched.

cartographer.mapping_2d.proto.RangeDataInserterOptions range_data_inserter_options Not yet documented.

1.11 cartographer.mapping_2d.scan_matching.proto.CeresScanMatcherOptions

double occupied_space_weight Scaling parameters for each cost functor.

double translation_weight Not yet documented.

double rotation_weight Not yet documented.

cartographer.common.proto.CeresSolverOptions ceres_solver_options Configure the Ceres solver. See the Ceres documentation for more information: <https://code.google.com/p/ceres-solver/>

1.12 cartographer.mapping_2d.scan_matching.proto.FastCorrelativeScanMatcherOptions

double linear_search_window Minimum linear search window in which the best possible scan alignment will be found.

double angular_search_window Minimum angular search window in which the best possible scan alignment will be found.

int32 branch_and_bound_depth Number of precomputed grids to use.

1.13 cartographer.mapping_2d.scan_matching.proto.RealTimeCorrelativeScan

double linear_search_window Minimum linear search window in which the best possible scan alignment will be found.

double angular_search_window Minimum angular search window in which the best possible scan alignment will be found.

double translation_delta_cost_weight Weights applied to each part of the score.

double rotation_delta_cost_weight Not yet documented.

1.14 cartographer.mapping_3d.proto.LocalTrajectoryBuilderOptions

float min_range Rangefinder points outside these ranges will be dropped.

float max_range Not yet documented.

int32 num_accumulated_range_data Number of range data to accumulate into one unwarped, combined range data to use for scan matching.

float voxel_filter_size Voxel filter that gets applied to the range data immediately after cropping.

cartographer.sensor.proto.AdaptiveVoxelFilterOptions high_resolution_adaptive_voxel_filter_options Voxel filter used to compute a sparser point cloud for matching.

cartographer.sensor.proto.AdaptiveVoxelFilterOptions low_resolution_adaptive_voxel_filter_options Not yet documented.

bool use_online_correlative_scan_matching Whether to solve the online scan matching first using the correlative scan matcher to generate a good starting point for Ceres.

cartographer.mapping_2d.scan_matching.proto.RealTimeCorrelativeScanMatcherOptions real_time_correlative_scan_matcher_options Not yet documented.

cartographer.mapping_3d.scan_matching.proto.CeresScanMatcherOptions ceres_scan_matcher_options Not yet documented.

cartographer.mapping.proto.MotionFilterOptions motion_filter_options Not yet documented.

double imu_gravity_time_constant Time constant in seconds for the orientation moving average based on observed gravity via the IMU. It should be chosen so that the error 1. from acceleration measurements not due to gravity (which gets worse when the constant is reduced) and 2. from integration of angular velocities (which gets worse when the constant is increased) is balanced.

int32 rotational_histogram_size Number of histogram buckets for the rotational scan matcher.

cartographer.mapping_3d.proto.SubmapsOptions submaps_options Not yet documented.

1.15 cartographer.mapping_3d.proto.RangeDataInserterOptions

double hit_probability Probability change for a hit (this will be converted to odds and therefore must be greater than 0.5).

double miss_probability Probability change for a miss (this will be converted to odds and therefore must be less than 0.5).

int32 num_free_space_voxels Up to how many free space voxels are updated for scan matching. 0 disables free space.

1.16 cartographer.mapping_3d.proto.SubmapsOptions

double high_resolution Resolution of the ‘high_resolution’ map in meters used for local SLAM and loop closure.

double high_resolution_max_range Maximum range to filter the point cloud to before insertion into the ‘high_resolution’ map.

double low_resolution Resolution of the ‘low_resolution’ version of the map in meters used for local SLAM only.

int32 num_range_data Number of range data before adding a new submap. Each submap will get twice the number of range data inserted: First for initialization without being matched against, then while being matched.

cartographer.mapping_3d.proto.RangedDataInserterOptions range_data_inserter_options Not yet documented.

1.17 cartographer.mapping_3d.scan_matching.proto.CeresScanMatcherOptions

double occupied_space_weight Scaling parameters for each cost functor.

double translation_weight Not yet documented.

double rotation_weight Not yet documented.

bool only_optimize_yaw Whether only to allow changes to yaw, keeping roll/pitch constant.

cartographer.common.proto.CeresSolverOptions ceres_solver_options Configure the Ceres solver. See the Ceres documentation for more information: <https://code.google.com/p/ceres-solver/>

1.18 cartographer.mapping_3d.scan_matching.proto.FastCorrelativeScanMatcherOptions

int32 branch_and_bound_depth Number of precomputed grids to use.

int32 full_resolution_depth Number of full resolution grids to use, additional grids will reduce the resolution by half each.

double min_rotational_score Minimum score for the rotational scan matcher.

double min_low_resolution_score Threshold for the score of the low resolution grid below which a match is not considered. Only used for 3D.

double linear_xy_search_window Linear search window in the plane orthogonal to gravity in which the best possible scan alignment will be found.

double linear_z_search_window Linear search window in the gravity direction in which the best possible scan alignment will be found.

double angular_search_window Minimum angular search window in which the best possible scan alignment will be found.

1.19 cartographer.sensor.proto.AdaptiveVoxelFilterOptions

float max_length ‘max_length’ of a voxel edge.

float min_num_points If there are more points and not at least 'min_num_points' remain, the voxel length is reduced trying to get this minimum number of points.

float max_range Points further away from the origin are removed.

This documents a few common patterns that exist in the Cartographer codebase.

2.1 Frames

global map frame This is the frame in which global SLAM results are expressed. It is the fixed map frame including all loop closure and optimization results. The transform between this frame and any other frame can jump when new optimization results are available. Its z-axis points upwards, i.e. the gravitational acceleration vector points in the -z direction, i.e. the gravitational component measured by an accelerometer is in the +z direction.

local map frame This is the frame in which local SLAM results are expressed. It is the fixed map frame excluding loop closures and the pose graph optimization. For a given point in time, the transform between this and the global map frame may change, but the transform between this and all other frames does not change.

submap frame Each submap has a separate fixed frame.

tracking frame The frame in which sensor data is expressed. It is not fixed, i.e. it changes over time. It is also different for different trajectories.

gravity-aligned frame Only used in 2D. A frame colocated with the tracking frame but with a different orientation that is approximately aligned with gravity, i.e. the gravitational acceleration vector points approximately in the -z direction. No assumption about yaw (rotation around the z axis between this and the tracking frame) should be made. A different gravity-aligned frame is used for different trajectory nodes, e.g. yaw can change arbitrarily between gravity-aligned frames of consecutive nodes.

2.2 Transforms

local_pose Transforms data from the tracking frame (or a submap frame, depending on context) to the local map frame.

global_pose Transforms data from the tracking frame (or a submap frame, depending on context) to the global map frame.


local_submap_pose Transforms data from a submap frame to the local map frame.

global_submap_pose Transforms data from a submap frame to the global map frame.

Cartographer is a system that provides real-time simultaneous localization and mapping (SLAM) in 2D and 3D across multiple platforms and sensor configurations.

Technical Overview

- High level system overview of Cartographer

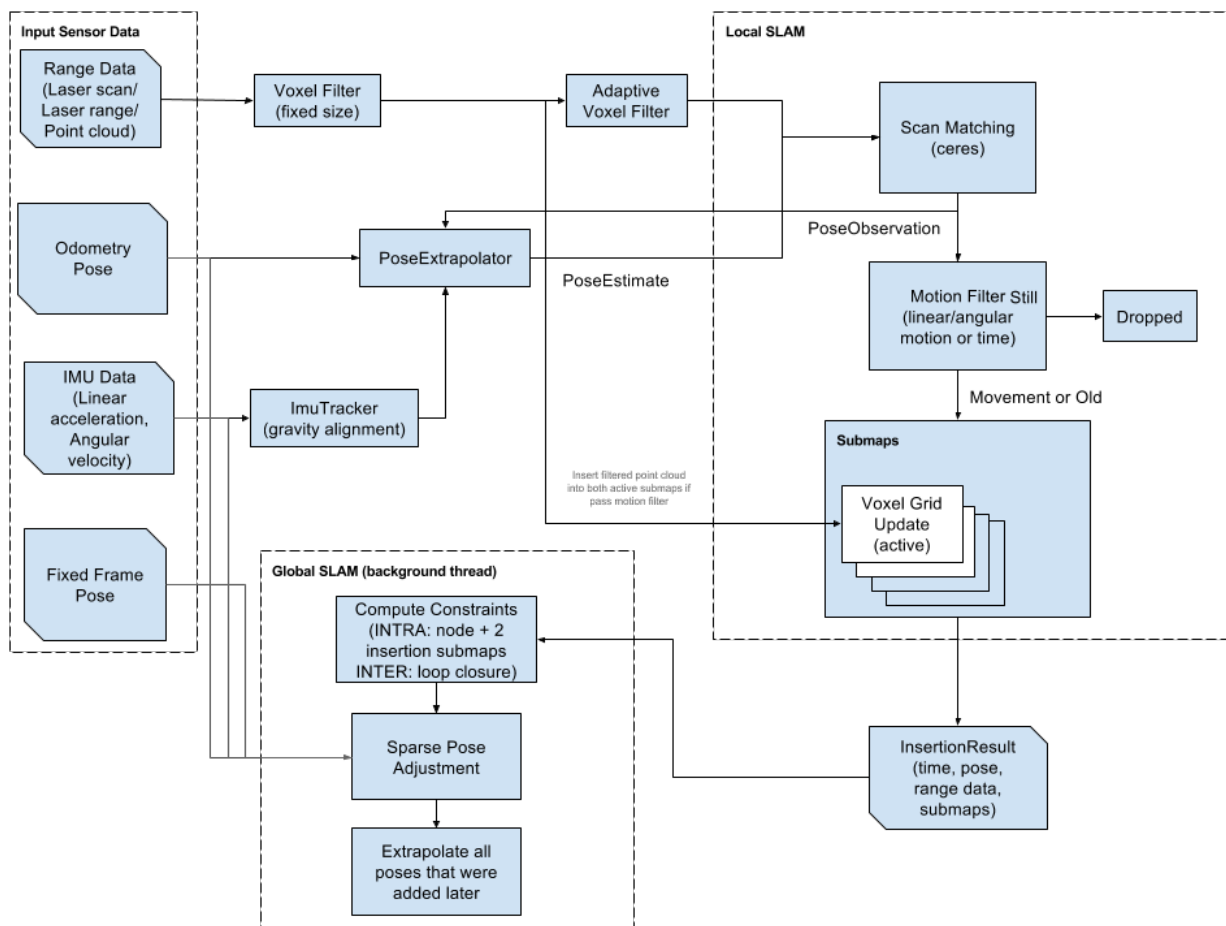

Cartographer is a standalone C++ library. To get started quickly, use our [ROS](#) integration.

4.1 Getting started with ROS

ROS integration is provided by the [Cartographer ROS repository](#). You will find complete documentation for using Cartographer with ROS at the [Cartographer ROS Read the Docs site](#).

4.2 Getting started without ROS

Please see our ROS integration as a starting point for integrating your system with the standalone library. Currently, it is the best available reference.

On Ubuntu 14.04 (Trusty):

```
# Install the required libraries that are available as debs.
sudo apt-get update
sudo apt-get install -y \
    cmake \
    g++ \
    git \
    google-mock \
    libboost-all-dev \
    libcairo2-dev \
    libeigen3-dev \
    libgflags-dev \
    libgoogle-glog-dev \
    liblua5.2-dev \
    libsuitesparse-dev \
    ninja-build \
    python-sphinx
```

```
VERSION="1.13.0"

# Build and install Ceres.
git clone https://ceres-solver.googlesource.com/ceres-solver
cd ceres-solver
git checkout tags/${VERSION}
mkdir build
cd build
cmake .. -G Ninja
ninja
ninja test
sudo ninja install
```

```
VERSION="v3.4.1"

# Build and install proto3.
git clone https://github.com/google/protobuf.git
cd protobuf
git checkout tags/${VERSION}
mkdir build
cd build
cmake -G Ninja \
  -DCMAKE_POSITION_INDEPENDENT_CODE=ON \
  -DCMAKE_BUILD_TYPE=Release \
  -Dprotobuf_BUILD_TESTS=OFF \
  ../cmake
ninja
sudo ninja install
```

```
# Build and install Cartographer.
cd cartographer
mkdir build
cd build
cmake .. -G Ninja
ninja
ninja test
sudo ninja install
```

System Requirements

Although Cartographer may run on other systems, it is confirmed to be working on systems that meet the following requirements:

- 64-bit, modern CPU (e.g. 3rd generation i7)
- 16 GB RAM
- Ubuntu 14.04 (Trusty) and 16.04 (Xenial)
- gcc version 4.8.4 and 5.4.0

5.1 Known Issues

- 32-bit builds have libeigen alignment problems which cause crashes and/or memory corruptions.

CHAPTER 6

How to cite us

Background about the algorithms developed for Cartographer can be found in the following publication. If you use Cartographer for your research, we would appreciate it if you cite our paper.

W. Hess, D. Kohler, H. Rapp, and D. Andor, [Real-Time Loop Closure in 2D LIDAR SLAM](#), in *Robotics and Automation (ICRA), 2016 IEEE International Conference on*. IEEE, 2016. pp. 1271–1278.